


ifi

SupaNova

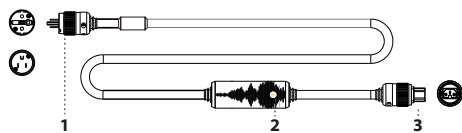

1. IEC (male)

Plug into a wall outlet that supplies power to audio equipment, or plug into a power extension block that supplies power to audio equipment.

2. Polarity/Earth detection

The following table depicts the different readings and the respective LED colour combinations. Where needed, make the necessary system adjustments.

	Polarity (LED)	Earth (LED)	Status
1	Green	Green	Normal
2	Red	Green	Polarity error. Live and Neutral connections are reversed.
3	Red	Red	Ground error. Earth is missing or faulty (e.g. resistance too high).
4	Off	Off	Cut-out mode. Over-voltage or an electrical short.

Tips: Regardless of the LED colour, the SupaNova will always be actively cancelling noise.

3. Power outlet IEC

Connect to your device.

Specifications

Noise reduction:	> 40dB (> 100x)
Surge Protection:	max. 10,000A @ 775V / 8/20uS
Under operating voltage:	Maximum operating rating 10A at 250Vac and 15A at 125Vac
Dimensions:	1.8 m (70.8")
Net weight:	
USA:	675 g (1.43 lbs)
EUR:	695 g (1.47 lbs)
Warranty period:	12 months

Specifications are subject to change without notice.